

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
15 August 2002 (15.08.2002)

PCT

(10) International Publication Number  
**WO 02/063235 A2**

(51) International Patent Classification<sup>7</sup>: **G01B 7/00**

(72) Inventors; and

(21) International Application Number: **PCT/GB02/00465**

(75) Inventors/Applicants (for US only): **COLLINGWOOD, David** [GB/GB]; 1 Lawns Park, North Woodchester, Stroud, Gloucestershire, GL5 5PP (GB). **FUGE, Jonathan, Paul** [GB/GB]; 208 Dovercourt Road, Ilorfield, Bristol, BS7 9SL (GB). **SALT, Geoffrey** [GB/GB]; 26 Everest Road, Bristol BS16 2BX (GB).

(22) International Filing Date: 1 February 2002 (01.02.2002)

(25) Filing Language: English

(74) Agents: **JACKSON, John, Timothy et al.**; Renishaw PLC, Patent Department, New Mills, Wotton-under-Edge, Gloucestershire GL12 8JR (GB).

(26) Publication Language: English

(30) Priority Data:  
0102750.7 2 February 2001 (02.02.2001) GB  
0112998.0 30 May 2001 (30.05.2001) GB

(81) Designated States (national): JP, US.

(71) Applicant (for all designated States except US): **RENISHAW PLC** [GB/GB]; New Mills, Wotton-under-Edge, Gloucestershire GL12 8JR (GB).


(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

Declaration under Rule 4.17:

of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: MACHINE TOOL PROBE

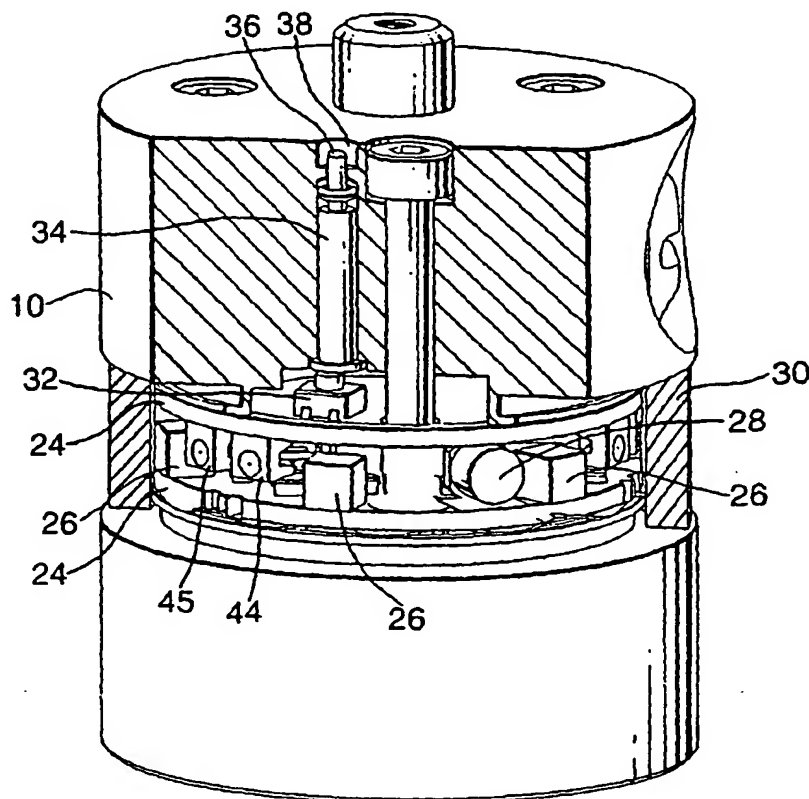

(57) Abstract: A probe (10) has internal circuitry capable of operating in a plurality of different modes, for example a variety of filter modes and turn off modes. A switch on the probe sends an input to a controller which is arranged to preset the mode in response to operation of the switch. The switch may be a push button (32) which is operated externally of the probe (10) by means of an actuator in the form of a plunger (34). The probe has a work-piece-contacting stylus (11) mounted on a seat from which it is deflectable. The stylus and the seat may comprise the switch. An indicator, eg an LED (44), indicates the mode in response to an output from the controller. The controller outputs a plurality of indications of different modes in a sequence and a mode is selected by operating the switch one the desired mode is indicated.

BEST AVAILABLE COPY

WO 02/063235 A2

**WO 02/063235 A2**



**Published:**

- without international search report and to be republished upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## MACHINE TOOL PROBE

This invention relates to probes for use on position determining apparatus such as coordinate measuring machines, measuring robots and in particular machine tools.

An example of such a probe is shown in US Patent No. 4,153,998. Probes intended for use on machine tools, in which there is a wireless signal transmission system between the probe and the controller of the machine tool, are shown in European Patent Numbers 337669 and 337670.

As such probes have become more complex over the years, there has been a need for them to operate in different modes.

For example, it can be desirable for the signal produced by the probe to be filtered prior to transmitting it to the controller, in order to prevent the generation of spurious signals as a result of vibration. Therefore, the probe may be preset to use different types of filtering, or no filtering, depending on the machine tool and the environment into which it has been installed.

Furthermore, on machine tools such probes are commonly battery operated. The wireless signal transmission system also includes a receiver for receiving a switch-on or start signal. This switches the probe on from a sleeping state in which it consumes very low current, ready for normal use. It is then desirable to switch the probe circuitry off (back to the sleeping state)

after use. The probe may have different preset modes, giving different manners in which the circuitry is turned off.

5 In known probes, such modes are preset by the use of DIP switches on a circuit board internally within the probe. This has a number of disadvantages. In order to change the preset mode, the operator has to dismantle the probe to access the DIP switches. There  
10 is a risk that the operator will damage the printed circuit board, and the probe has to be designed to permit such dismantling. Where the DIP switches act on a micro controller to preset the mode, there is a restriction on the number of input lines to the micro  
15 controller. With, say, three such input lines from a three-gang DIP switch, a maximum of eight modes can be preset. Any more modes would require a larger number of input lines to the micro controller. Finally, it would be desirable to provide a pre-setting device  
20 which is smaller, less expensive and more reliable than DIP switches.

The present invention provides a probe for position determining apparatus, having internal circuitry  
25 capable of operating in a plurality of different modes, a switch, a controller connected to receive an input from the switch and arranged to preset the mode in response to operation of the switch, an indicator for indicating the mode in response to an output from the  
30 controller, the controller being arranged to output a plurality of indications of different modes in a sequence, and to select the mode just indicated upon an operation of the switch.

Preferably, the switch is mounted inside the probe but is operable by an actuator accessible from outside the probe.

5 In a first embodiment the switch comprises a push button.

---

In a second embodiment of the invention the probe has a workpiece-contacting stylus mounted on a seat from  
10 which it is deflectable, wherein the stylus and the seat comprise said switch. The seat may be kinematic. The controller receives an input from the switch when the stylus is deflected.

15 Each mode may also include a plurality of different sub-modes. The controller may be arranged to output a plurality of indications of different sub-modes in a sequence and select the sub-mode just indicated upon an operation of the switch.

20 Preferred embodiments of the invention will now be described with reference to the accompanying drawings, wherein:

Fig 1 is a diagrammatic view of a probe on a  
25 machine tool;

Fig 2 is a partly sectional view of part of a first embodiment of the probe of Fig 1;

Fig 3 is a block circuit diagram showing a micro controller within the probe;

30 Fig 4 is a flow chart of a program of the first embodiment which runs in the micro controller;

Fig 5 is a side view of the second embodiment of the probe;

Fig 6 is a sectional view of the probe of Fig 5

through A-A;

Fig 7 is a sectional view of the probe of Fig 5 through B-B; and

Fig 8 is a flow chart of a program of the second  
5 embodiment which runs in the micro-controller.

Referring to Fig 1, a probe 10 is mounted in the spindle 12 of a machine tool, exchangeably with the normal cutting tools. The spindle 12 can move the  
10 probe in three dimensions X,Y,Z, relative to a workpiece 14 clamped on the table or bed 22 of the machine tool. Measurements are made by contact between a stylus 11 of the probe and the workpiece. Measurement signals from the probe are transmitted  
15 optically, as indicated by arrow 16, to a receiver module 19 mounted on fixed structure 20 of the machine tool. The module 19 can also transmit an optical (e.g. infrared) switch-on or start signal, indicated by arrow 18, to the probe 10. The probe 10 is battery operated,  
20 and remains in a sleeping state until receipt of the switch-on signal 18, whereupon it starts transmitting measurement signals 16.

Fig 2 shows a first embodiment of the probe 10 in more  
25 detail. Internally, it has two circuit boards 24, on which are fitted light emitting diodes 26 for transmitting the optical measurement signals 16. The boards 24 also have a plurality of photodiodes 28 (only one of which can be seen in Fig 2), for receiving the  
30 switch-on signal 18. Furthermore, they have indicators in the form of red and green light emitting diodes (LEDs) 44,45. The light emitting diodes 26, the photodiodes 28 and the indicator LEDs 44,45 are distributed around the circumference of the probe,

behind a glass window 30.

One of the circuit boards 24 is provided with a push button switch 32. This can be operated from externally  
 5 of the probe, by means of an actuator 34 in the form of a plunger. The external end 36 of this plunger lies within a recess 38, and can be actuated by means of a suitable pointed implement.

- 10 The following table illustrates various possible modes which can be preset by the use of the push button switch 32.

MODE	TURN OFF SELECT				FILTER SELECT		
	OPTICAL	TIME 10sec	TIME 30sec	TIME 134sec	NO FILTER	ANALOGUE	DIGITAL
1	✓				✓		
2	✓					✓	
3	✓						✓
4		✓			✓		
5		✓				✓	
6		✓					✓
7			✓		✓		
8			✓			✓	
9			✓				✓
10				✓	✓		
11				✓		✓	
12				✓			✓

- 15 It will be seen that the items which can be selected fall into two groups. Under the heading "turn off select" there are various presettable possibilities for the manner in which probe circuitry is turned off (i.e. returned to its sleeping state in which it no longer  
 20 transmits measurement signals 16). The first column under this heading indicates modes in which the probe circuitry is turned off by the receipt of another optical signal from the machine-mounted module 19, as indicated by the arrow 18. The remaining columns under

this heading indicate that the probe is turned off after a preset period of non-use (i.e. during which the stylus 11 of the probe 10 has not contacted the workpiece 14). In various different modes, the probe  
5 may be turned off after periods of 10 seconds, 30 seconds or 134 seconds of non-use.

The final three columns of the above table, labelled "filter select", indicate possible filtering which may  
10 be applied to the probe measurement signal before it is transmitted as the optical signal 16. The filtering selected will depend upon the machine to which the probe is installed and the environment. If the installation is not susceptible to vibration, then  
15 modes in which no filtering is performed may be preset. Alternatively, in different installations, modes with analogue filtering or digital filtering may be preset.

It will be seen that the table shows 12 possible modes,  
20 which between them give all possible combinations of "turn off select" and "filter select".

The push button 32 provides an input to a micro controller 40, seen in Fig 3. This has outputs 42 to  
25 the remaining circuitry on the circuit boards 24, which provide the various possibilities for turn off and filtering indicated in the above table. It also controls the light emitting diode indicators 44.

30 Referring to Fig 4, the micro controller 40 acts as follows. In step 46, in the sleeping state, the micro controller's program detects that the button 32 has been pushed. In steps 47, 48 and 49, it determines whether the button remains pushed for a period greater



- than 3 seconds. If the button is released within this 3 second period, then in program step 50 the micro controller outputs signals to the indicator 44 to indicate the current mode which has been preset previously. It does this by flashing the indicator 44 a number of times, corresponding to the mode number indicated in the above table (e.g. 3 flashes for mode 3).
- 10 Thus, the operator can obtain an indication of the current mode simply by depressing the button briefly (for less than 3 seconds). If desired, an alternative period such as 5 seconds may be used.
- 15 If the button is held depressed for more than 3 seconds, the program enters a loop comprising steps 51 to 59. Firstly, step 51 sets the mode number to 1, and step 52 provides an output to the indicator 44 to indicate this mode. Alternatively, step 51 may be omitted and the loop can start with the mode currently set. As in step 50, the mode is indicated by a corresponding number of flashes of the indicator 44.
- 20
- Next, in steps 53, 54 and 56, the program pauses, for example for 2 seconds, while checking the state of the button. If the button is released during this pause, (step 54) the program exits the loop, and in step 60 the micro controller provides outputs on the lines 42 to preset the filters and the turn off circuits of the probe. It does so in accordance with the mode last set in step 51.
- 25
- 30

If, in step 56, the button has not been released at the end of the 2 second pause, then the loop continues, via

program step 58 which increments the mode number.  
Should the maximum number of modes have been exceeded,  
then step 59 returns to the loop via step 51, which  
resets the mode number to 1. The new mode is now  
5 indicated in step 52, and steps 53, 54 and 56 pause to  
see if the operator releases the button.

Mode selection is therefore a very easy process for the  
operator. He simply presses the button, and holds it  
10 depressed while the program cycles through all the  
possible modes. He releases the button immediately  
after the mode required has been indicated. Thus, if  
he requires mode 5, he releases the button after the  
part of the cycle in which the indicator 44 flashes  
15 five times.

Of course, modifications are possible. In the above  
description, each time the program passes through step  
52 it flashes for a number of times corresponding to  
20 the mode number (once for mode 1, five times for mode  
5, etc). It may instead simply flash once on each pass  
through this program step. The operator then  
effectively counts the number of times that the program  
passes around the loop 52, 53, 54, 56, 58, releasing the  
25 button 32 at the appropriate time.

It is also possible to provide a more sophisticated  
indicator 44, giving a numerical indication, instead of  
a number of flashes.  
30

It will also be appreciated that the modes indicated in  
the table above are intended merely as examples. Other  
aspects of the operation of the probe may be preset in  
the various modes, in addition or instead of the

filtering and the turn off method.

The push button 32 in this preferred embodiment overcomes the problems of DIP switches discussed in the introduction.

10 A second embodiment of the probe 10 is shown in Figs 5-7. Figs 6 and 7 are sections along the lines A-A and B-B respectively shown in Fig 5. The probe 10 comprises a housing 24 and a stylus 11.

15 The electronics are mounted on a flexible material 70 which is positioned in a compact spiral arrangement along the inside circumference of the probe housing. The electronics include light emitting diodes 26 for transmitting the optical measurement signals 16, a plurality of photodiodes 28 for receiving the switch-on signal 18 and indicators 44 in the form of red and green light emitting diodes for indicating the mode.

20 The light emitting diodes 26, photodiodes 28 and indicators 44 are distributed around the circumference of the probe behind a glass window 30.

25 The stylus 11 is mounted on a kinematic seat inside the housing. The kinematic seat comprises three vee-shaped grooves each formed between a pair of ball bearings 72. The stylus has three cylindrical members 74 extending radially from its upper end which are urged into contact with the vee-shaped grooves by a spring 76.

30 This defines the rest position of the stylus 11. Such an arrangement is well known and described in US Patent No. 4,153,998.

When the stylus is in this rest position an electric

circuit which passes in series from one vee-shaped groove to the next adjacent one is completed. Each member is insulated from the stylus and other members and completes the circuit between the two sides of each  
5 respective vee-shaped groove. Deflection of the stylus results in at least one of the members breaking contact with the ball bearings and thus breaking the circuit. As described in US Patent No. 4,153,998 the breaking of the circuit is used to provide an input pulse to an  
10 automatic switching arrangement and thereby indicate that deflection of the stylus has occurred. In the present invention, this arrangement may also be used as a switch for changing between different preset modes, for example for selecting turn-off modes or selecting  
15 different filters.

The following table illustrates various possible modes which can be preset by using the probe stylus.

MODE	OPTION
Turn-off mode select	Optical off Short timeout Medium timeout Long timeout
Probe filter select	Probe filter on Probe filter off
Start filter select	Start Rejection filter on Start Rejection filter off

20

In this example there are three modes each mode having several options. The first mode in the table selects the turn-off method and has four options for pre-setting the manner in which the probe circuitry is  
25 turned off, as described in the previous embodiment. In the first option the probe circuitry is turned off following an optical signal from the machine mounted module as indicated by arrow 18 in Fig 1. The

remaining options indicate that the probe is turned off after a preset period of non-use, i.e. during which the probe stylus has not contacted the workpiece. For example, for a short time-out the probe turns off after  
5 about 10 seconds of non-use. A medium time-out may be about 30 seconds, and a long time-out may be about 134 seconds of non-use.

The second mode in the table is probe filter select as  
10 described in the previous embodiment. In this mode the options are the probe filter may be on or off.

The third mode in the table is the start signal filter select. This filter enables the probe to distinguish  
15 between the start signal (18 in Fig 1) and other external influences, such as light from fluorescent light bulbs, which may be confused with the start signal. However this filter introduces a time delay and thus may not be required when external influences  
20 are insignificant. In this mode, the options are the start signal filter may be on or off. Such a filter is disclosed in our European Patent Application No. 1130557.

25 As shown in Fig 3 the stylus is used as a switch 32 to provide an input to a micro-controller 40. This micro-controller sends outputs 42 to the circuitry in the probe which allows different modes to be selected and different options within each mode to be selected. The  
30 micro-controller also controls the light emitting diode indicators 44 which flash different signals to indicate the different modes and options.

Referring to Fig 8, the micro-controller 40 acts as

follows. The micro-controller is in a sleep mode 88 until it detects a battery being inserted 80 in the probe which starts a first timer 82. If the kinematic remains seated 84 (i.e. the stylus remains undeflected) for longer than 8 seconds 86, the probe will return to the sleep mode 88. However if the kinematic is unseated 84 for longer than 8 seconds 90, then once the kinematic has reseated 92 the mode and option will both be set to the first mode and option respectively 94 and the micro-controller will enter the mode and option setting loop 96-114. Alternatively this step can be omitted and the loop can start with the mode and option currently set.

Thus the micro-controller is activated by inserting the battery and the mode and option setting loop of the controller is entered by deflecting the stylus for a time period of eight seconds and then returning the stylus to its rest position.

20

When the mode and option setting loop 96-114 is entered a second timer is started 96 and the mode and option are displayed 98 by the indicator. As in the previous embodiment the indicator comprises LEDs. If more than 10 seconds has elapsed 100 without the kinematic unseating, then the micro-controller will return to its sleep mode 88.

If the kinematic unseats 102 within 10 seconds 100 then a third timer is started 104. If the kinematic reseats within 0.3 seconds 108, the micro-controller will return to the beginning of the loop at 96. If the kinematic has been unseated for greater than 0.3 seconds but less than 2 seconds 110 then the option is

advanced 112. If the kinematic has been unseated for greater than 2 seconds then the mode is advanced.

Thus once the micro-controller is in the mode and  
5 option setting loop, the option and mode may be advanced by deflecting the stylus for a short time period (i.e. for advancing the option) or a longer time period (i.e. for advancing the option).

10 Once either the mode or option are advanced, the micro-controller returns to the beginning of the loop 96-114. The second timer is started 96 and the new mode and option are displayed 98. The loop is exited if the kinematic remains seated for 10 seconds 100. Otherwise  
15 the micro-controller continues around the loop until the desired mode and option have been selected.

The function of the first, second and third timers 82,96,104 may all be carried out by a single timer.

20

Use of the stylus on its kinematic mount as a switch has several advantages. This arrangement is compact and so the size of the probe is able to be reduced. In addition, the kinematics for the stylus are part of the  
25 existing probe and thus no additional parts are needed.

In the above description the indicator flashes a number of times corresponding to the mode number and option number each time it cycles through the different modes  
30 and options. It is also possible to provide a more sophisticated indicator giving a numerical indication instead of a number of flashes.

The above example has three modes, each mode having

several options. Therefore the micro-controller can cycle between the three modes until the desired mode is selected and then cycle between the options of that mode until the desired option is selected. This is  
5 much quicker than cycling through every option of every mode in turn. The modes and options in the table are intended merely as examples. Other aspects of the operation of the probe may be preset in the various modes in addition or instead of the filtering and turn-  
10 off method.



## CLAIMS

1. A probe for position determining apparatus, having internal circuitry capable of operating in a plurality  
5 of different modes, a switch, a controller connected to receive an input from the switch and arranged to preset the mode in response to operation of the switch, an indicator for indicating the mode in response to an output from the controller, the controller being  
10 arranged to output a plurality of indications of different modes in a sequence, and to select the mode just indicated upon an operation of the switch.
2. A probe according to claim 1 in which the switch  
15 is mounted inside the probe and operated by an actuator accessible from outside the probe.
3. A probe according to any preceding claim in which the switch comprises a push button switch.  
20
4. A probe according to claim 1 in which the probe has a workpiece-contacting stylus mounted on a seat from which it is deflectable, wherein the stylus and the seat comprise said switch.  
25
5. A probe according to claim 4 wherein the controller receives an input from the switch when the stylus is deflected.
- 30 6. A probe according to any preceding claim wherein the indicator comprise at least one light emitting diode.
7. A probe according to any preceding claim wherein

an indication of the current mode may be obtained by operating the switch for less than a certain time period.

- 5    8.    A probe according to any preceding claim wherein  
if the switch is operated for greater than a certain  
time period, the controller enters a mode setting loop.
9.    A probe according to any preceding claim wherein  
10 each mode may also include a plurality of different  
sub-modes.
10.   A probe according to any preceding claim wherein  
the controller is activated by inserting a battery into  
15 a probe.

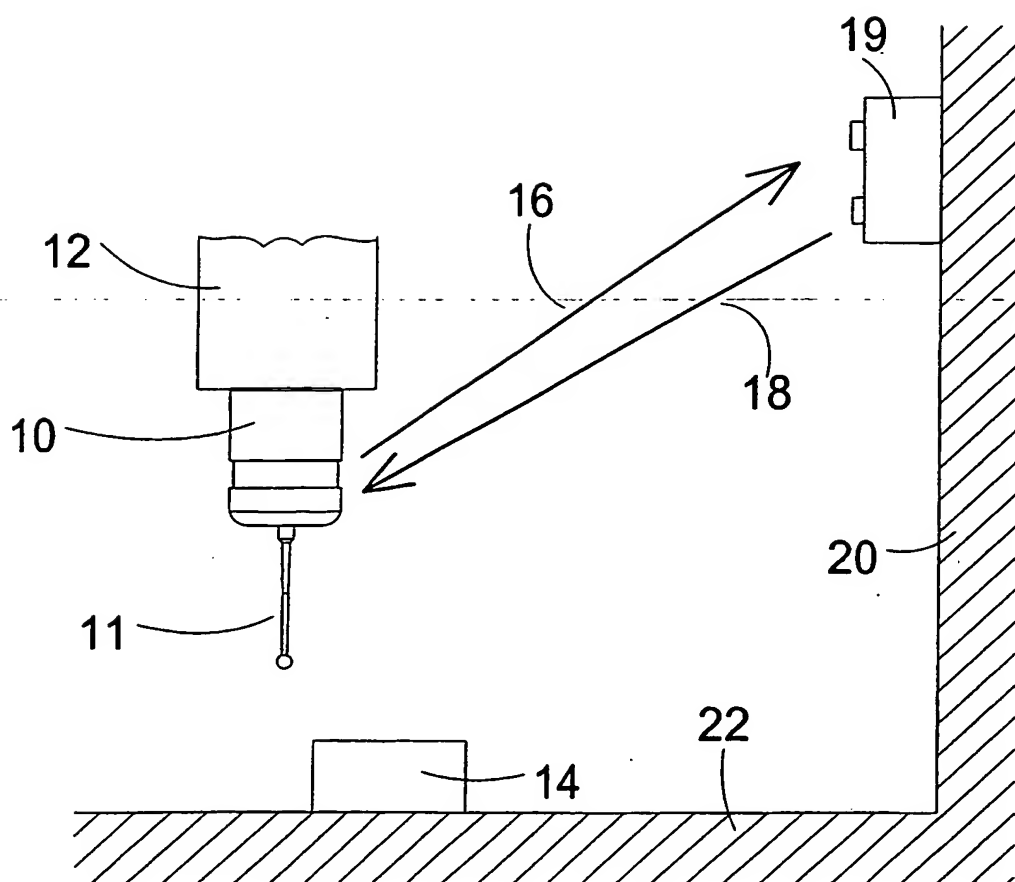


Fig 1

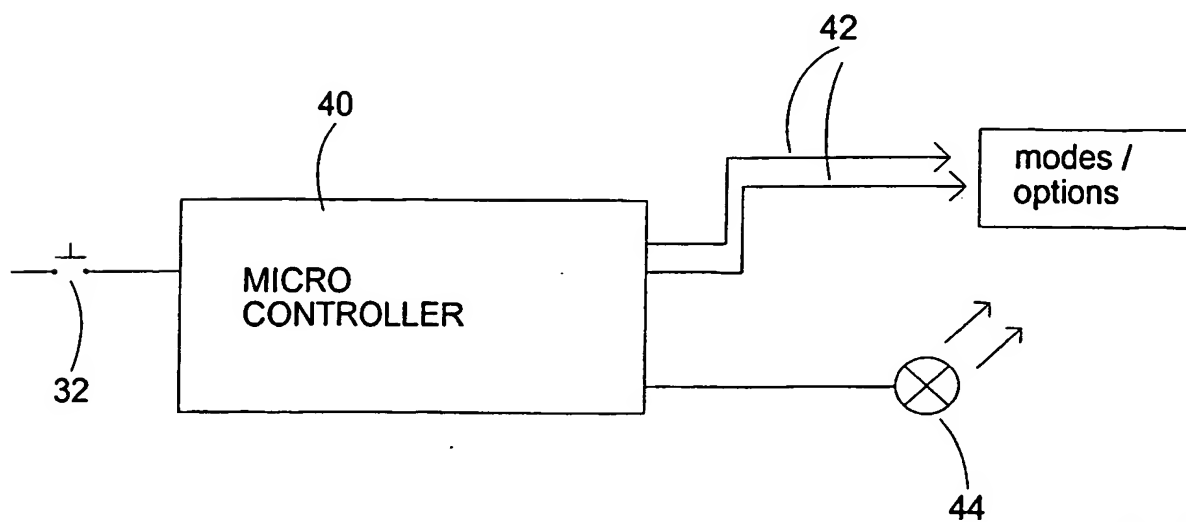
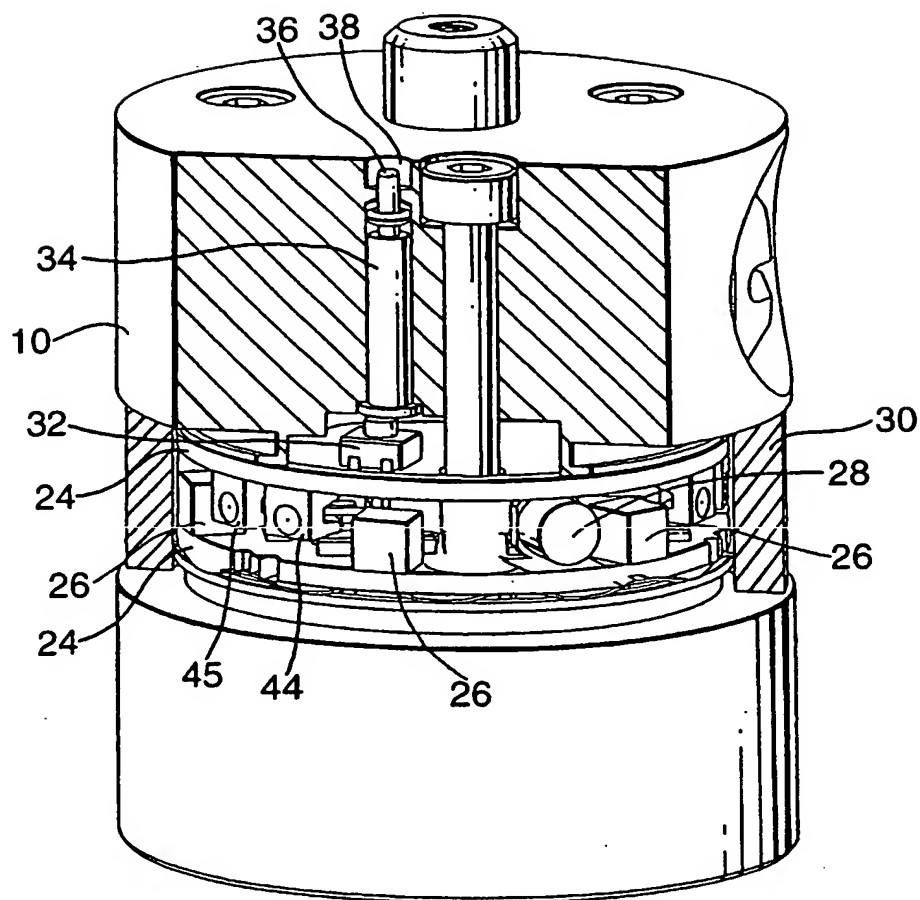


Fig 3

Fig.2.



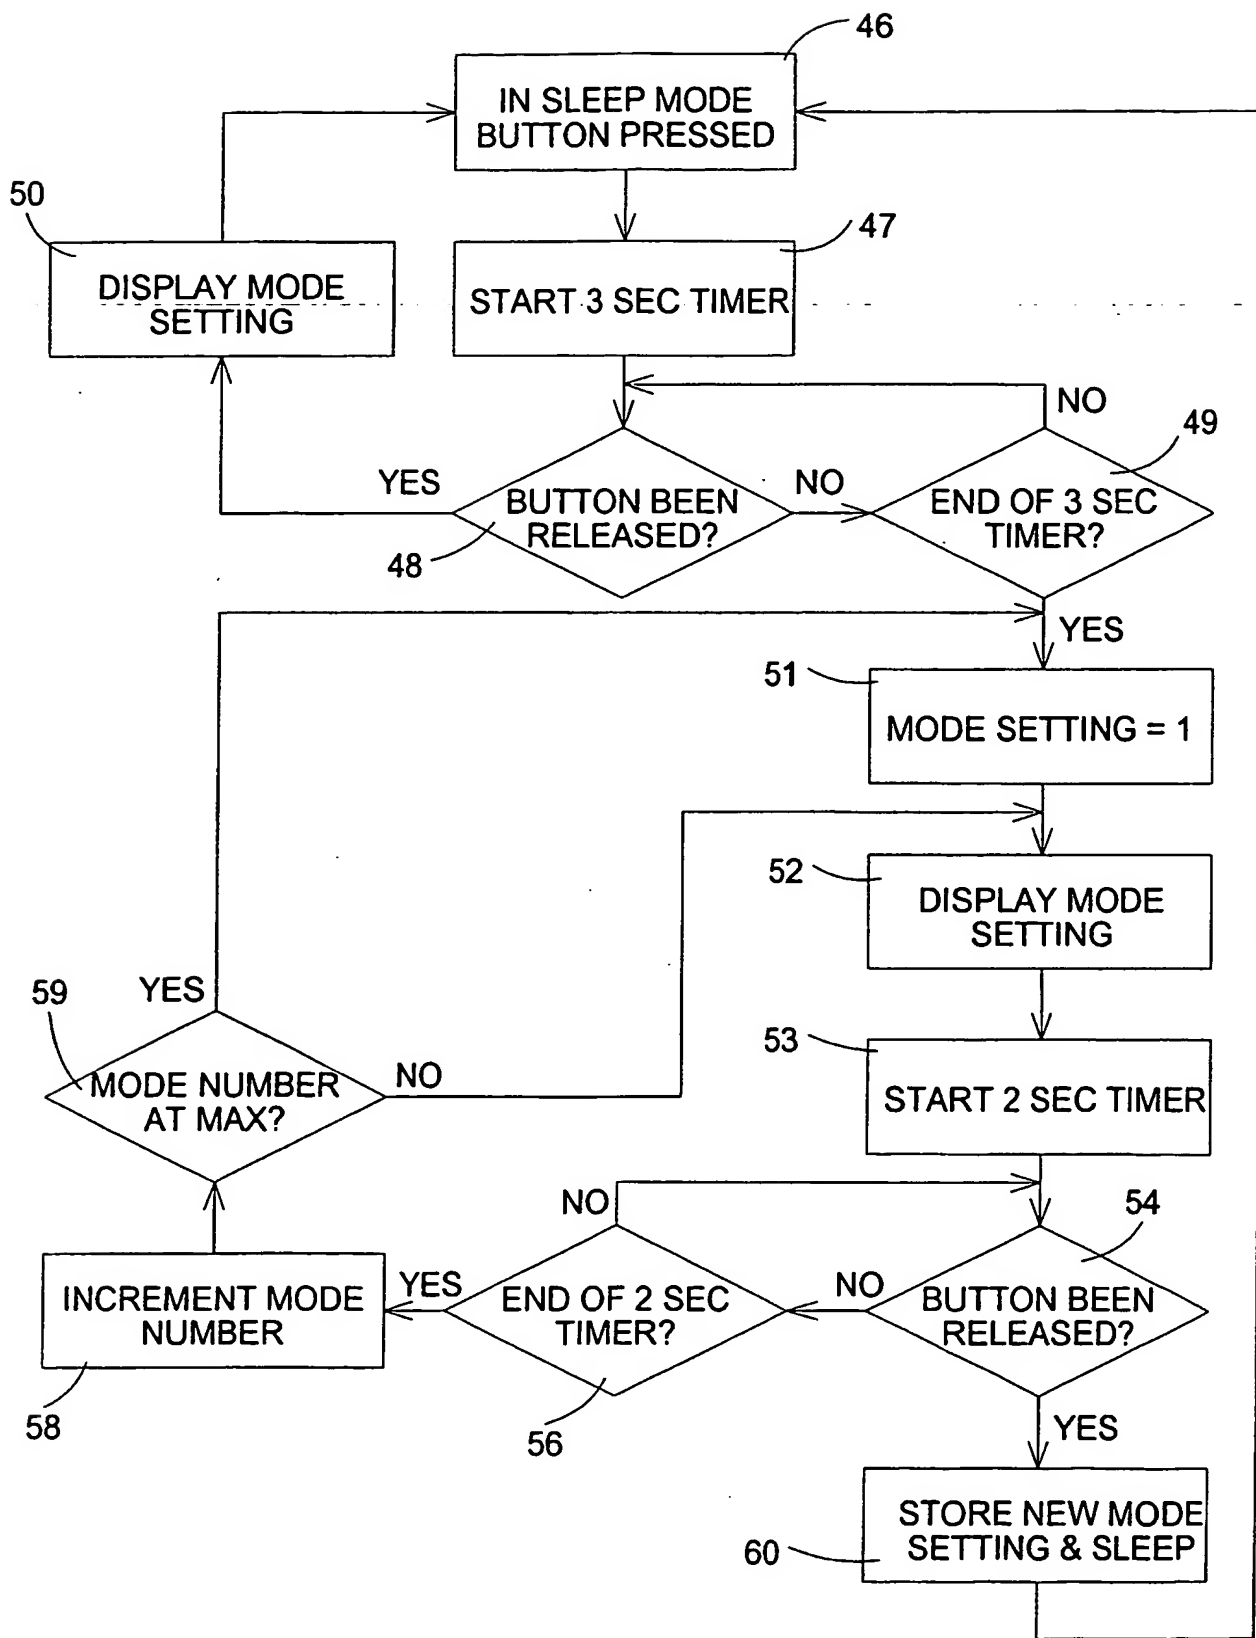


Fig 4

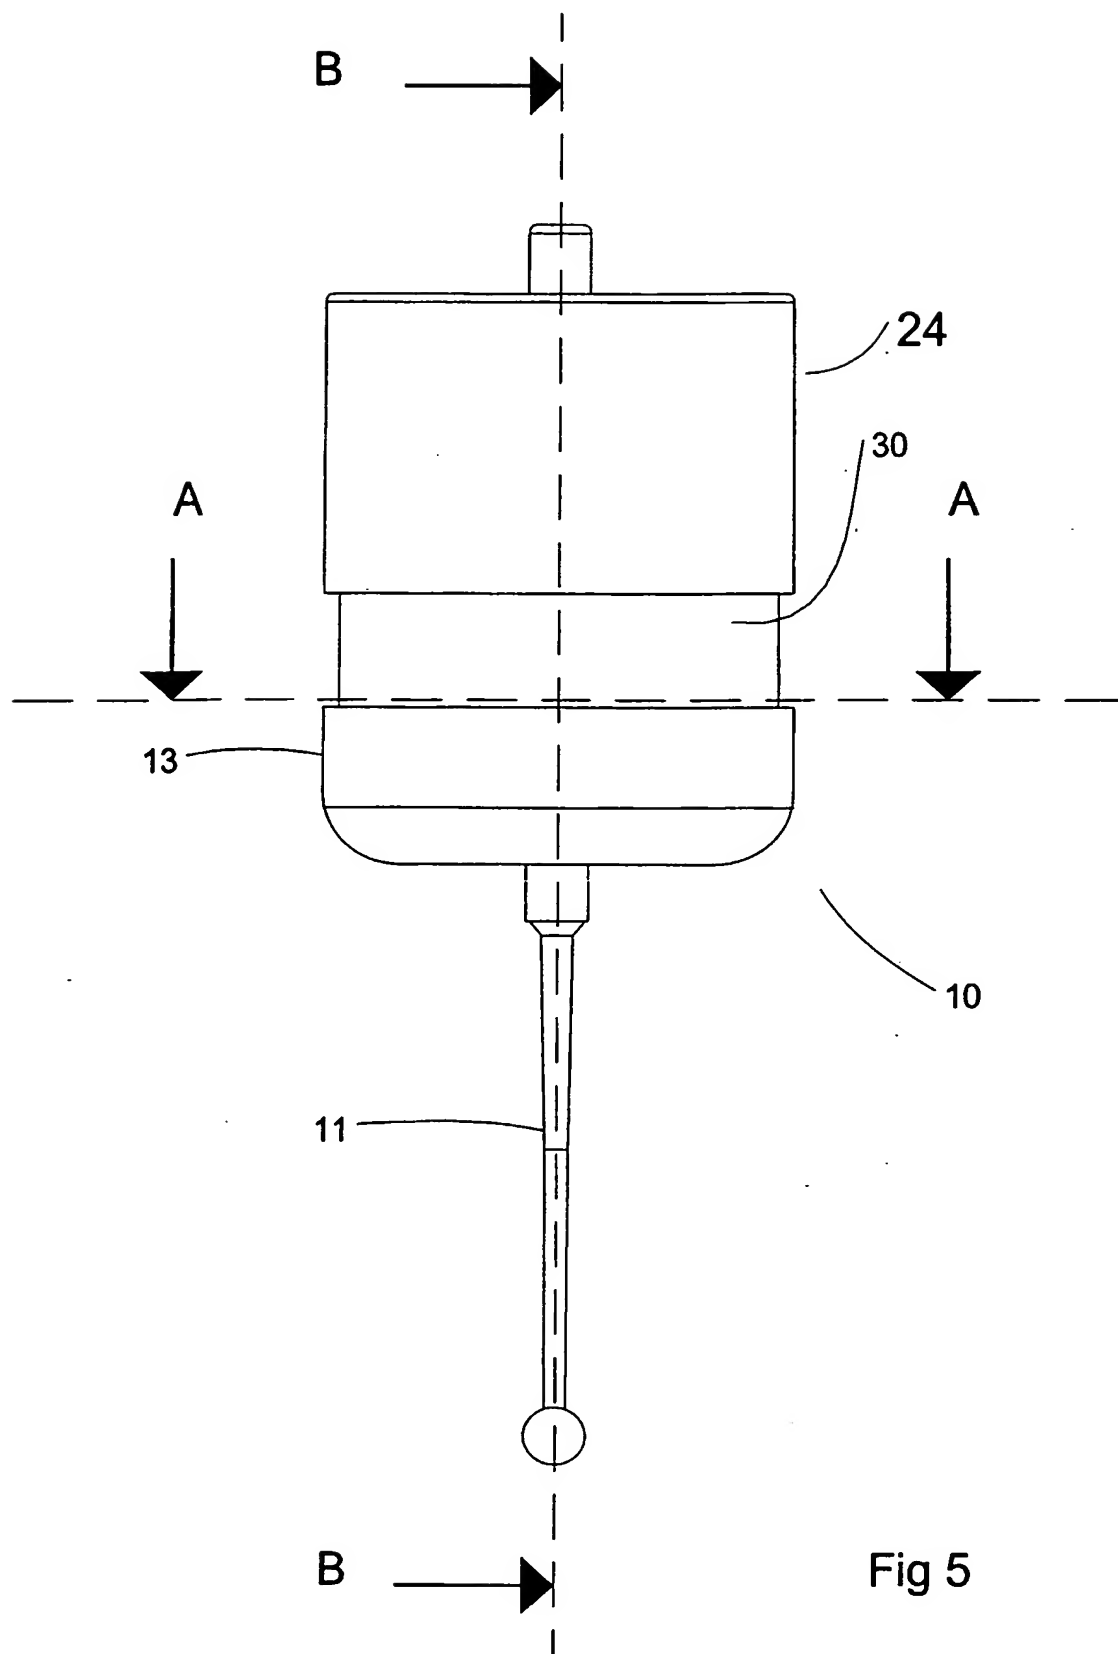
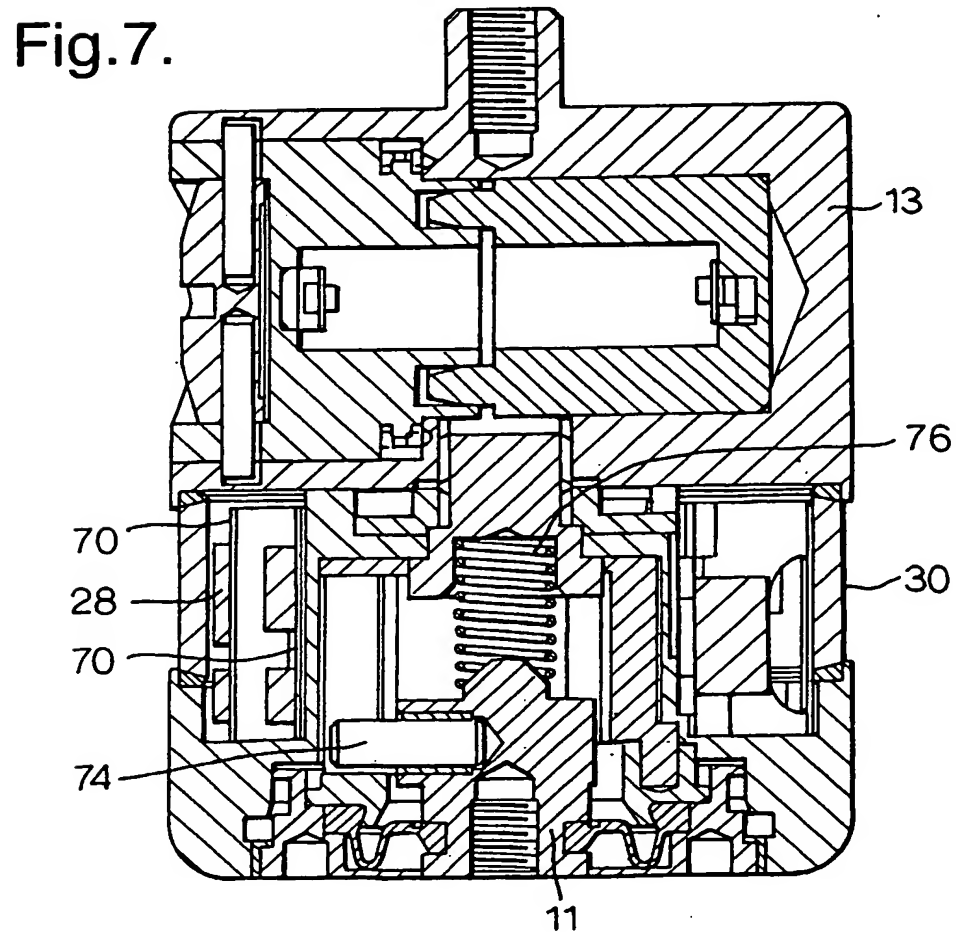
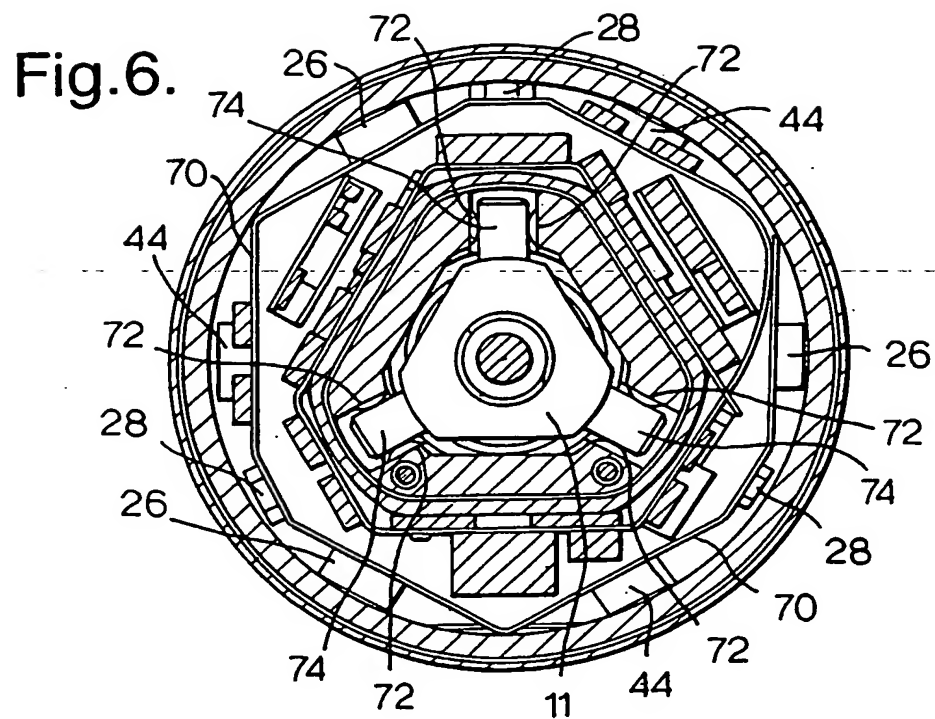


Fig 5



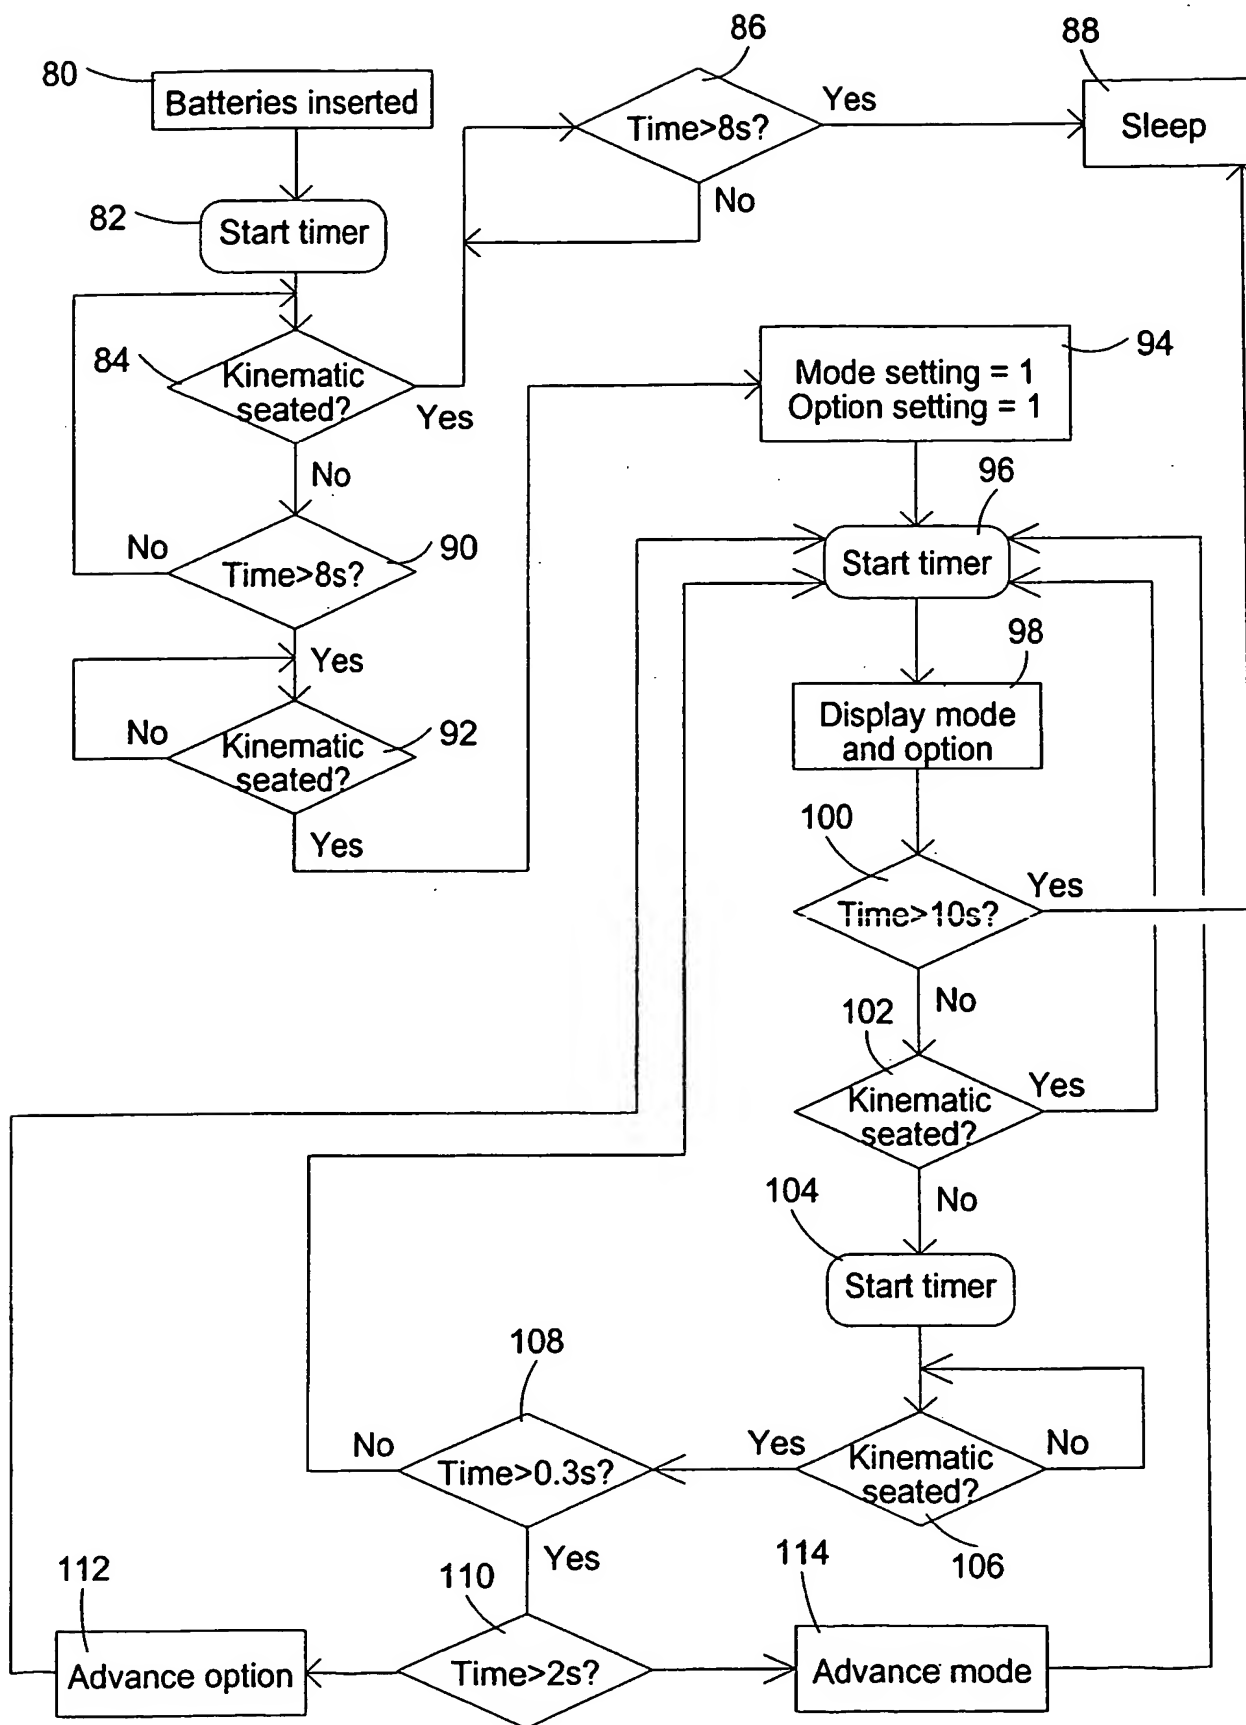


Fig 8



(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
15 August 2002 (15.08.2002)

PCT

(10) International Publication Number  
**WO 02/063235 A3**

(51) International Patent Classification<sup>7</sup>: **G05B 19/414**,  
(G01B 7/00)

(21) International Application Number: **PCT/GB02/00465**

(22) International Filing Date: **1 February 2002 (01.02.2002)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
0102750.7 2 February 2001 (02.02.2001) GB  
0112998.0 30 May 2001 (30.05.2001) GB

(71) Applicant (for all designated States except US): **RENISHAW PLC** [GB/GB], New Mills, Wotton-under-Edge, Gloucestershire GL12 8JR (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **COLLINGWOOD, David** [GB/GB]; 1 Lawns Park, North Woodchester, Stroud, Gloucestershire, GL5 5PP (GB). **FUGE, Jonathan, Paul** [GB/GB]; 208 Dovercourt Road, Horfield, Bristol, BS7 9SL (GB). **SALT, Geoffrey** [GB/GB]; 26 Everest Road, Bristol BS16 2BX (GB).

(74) Agents: **JACKSON, John, Timothy et al.**; Renishaw PLC, Patent Department, New Mills, Wotton-under-Edge, Gloucestershire GL12 8JR (GB).

(81) Designated States (national): **JP, US.**


(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

**Declaration under Rule 4.17:**

— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: **MACHINE TOOL PROBE**

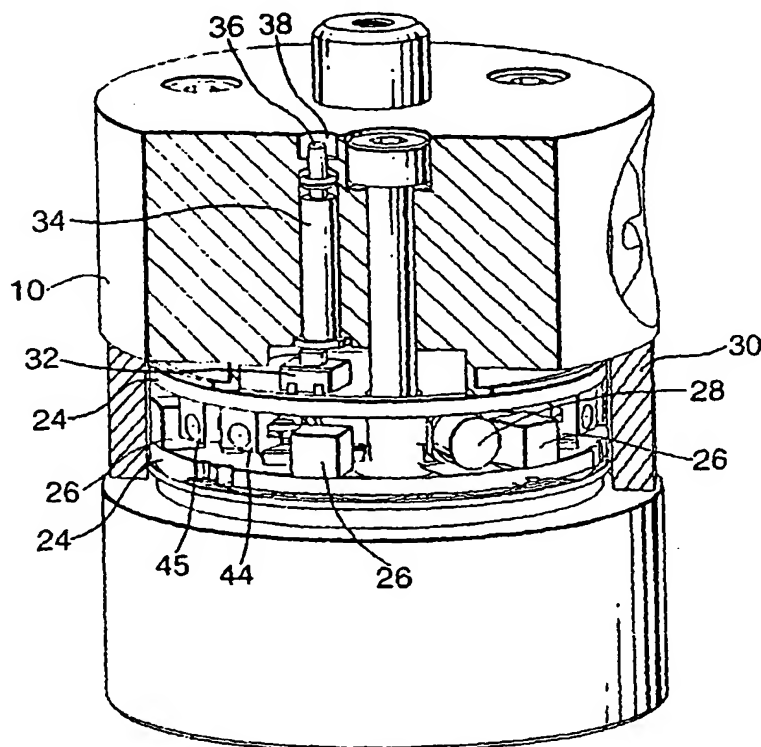

(57) Abstract: A probe (10) has internal circuitry capable of operating in a plurality of different modes, for example a variety of filter modes and turn off modes. A switch on the probe sends an input to a controller which is arranged to preset the mode in response to operation of the switch. The switch may be a push button (32) which is operated externally of the probe (10) by means of an actuator in the form of a plunger (34). The probe has a work-piece-contacting stylus (11) mounted on a seat from which it is deflectable. The stylus and the seat may comprise the switch. An indicator, eg an LED (44), indicates the mode in response to an output from the controller. The controller outputs a plurality of indications of different modes in a sequence and a mode is selected by operating the switch one the desired mode is indicated.



**Published:**

— with international search report

**(88) Date of publication of the international search report:**  
30 October 2003

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 02/00465

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 G05B19/414 G01B7/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 G05B G01B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 872 787 A (RENISHAW PLC) 21 October 1998 (1998-10-21) column 3, line 16 -column 6, line 45; figures 1-3	1-3, 6-10
X	DE 200 03 960 U (MADLENER WOLFGANG ; VEIL WILFRIED (DE)) 13 July 2000 (2000-07-13) page 6-11; figures 1, 2	1, 4-10
X	US 4 145 816 A (JOHNSTONE RICHARD ET AL) 27 March 1979 (1979-03-27) column 1, line 56 -column 3, line 20; figure 1	1, 3-5, 10
A	US 5 739 654 A (WEISSMANN ERWIN ERNST ET AL) 14 April 1998 (1998-04-14) column 3, line 55 -column 5, line 29; figures 1, 3	1-10
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "Z" document member of the same patent family

Date of the actual completion of the international search

19 August 2002

Date of mailing of the international search report

29/08/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Tran-Tien, T

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 02/00465

## C.(Continuation), DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 599 524 A (MCMURTRY DAVID R) 8 July 1986 (1986-07-08) abstract	1-10
A	GB 2 141 365 A (GTE VALERON CORP) 19 December 1984 (1984-12-19) abstract	1-10
A	EP 0 337 669 A (RENISHAW PLC) 18 October 1989 (1989-10-18) cited in the application abstract	1
A	US 4 153 998 A (MCMURTRY DAVID R) 15 May 1979 (1979-05-15) cited in the application abstract	1

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 02/00465

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0872787	A	21-10-1998	FR 2762110 A1	16-10-1998
			EP 0872787 A1	21-10-1998
			JP 11002514 A	06-01-1999
			US 6301796 B1	16-10-2001
DE 20003960	U	13-07-2000	DE 19913580 C1	15-02-2001
			DE 20003960 U1	13-07-2000
			US 6370789 B1	16-04-2002
US 4145816	A	27-03-1979	BR 7807577 A	26-06-1979
			CS 207726 B2	31-08-1981
			DE 2861883 D1	22-07-1982
			EP 0002023 A1	30-05-1979
			IL 55896 A	31-12-1981
			IT 1108695 B	09-12-1985
			KR 8200477 A	07-04-1982
			NO 783808 A	22-05-1979
			PL 211082 A1	18-06-1979
			SU 784745 A3	30-11-1980
			US RE30975 E	22-06-1982
US 5739654	A	14-04-1998	NONE	
US 4599524	A	08-07-1986	DE 3379478 D1	27-04-1989
			EP 0108521 A1	16-05-1984
			WO 8401620 A1	26-04-1984
			JP 6063724 B	22-08-1994
GB 2141365	A	19-12-1984	AU 555481 B2	25-09-1986
			AU 2759584 A	20-12-1984
			BE 899915 A1	01-10-1984
			CA 1237178 A1	24-05-1988
			CH 669842 A5	14-04-1989
			DE 3422181 A1	20-12-1984
			FR 2548349 A1	04-01-1985
			IT 1209553 B	30-08-1989
			JP 60013202 A	23-01-1985
			KR 9002677 B1	23-04-1990
			MX 158057 A	29-12-1988
			NL 8401874 A ,B,	02-01-1985
			SE 457336 B	19-12-1988
			SE 8403156 A	15-12-1984
			US 4779319 A	25-10-1988
			US 4978857 A	18-12-1990
			US 5065035 A	12-11-1991
			ZA 8403832 A	29-01-1986
EP 0337669	A	18-10-1989	DE 68916463 D1	04-08-1994
			DE 68916463 T2	17-11-1994
			EP 0337669 A2	18-10-1989
			JP 2021794 A	24-01-1990
			JP 2994401 B2	27-12-1999
			US 5150529 A	29-09-1992
			EP 0337670 A2	18-10-1989
			JP 2015733 A	19-01-1990
US 4153998	A	15-05-1979	GB 1445977 A	11-08-1976
			CH 584884 A5	15-02-1977

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 02/00465

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4153998	A	CH 594230 A5	30-12-1977
		DE 2347633 A1	04-04-1974
		DE 2365984 A1	14-04-1977
		DE 7730258 U1	16-02-1978
		IT 1003537 B	10-06-1976
		JP 1266244 C	27-05-1985
		JP 49094370 A	07-09-1974
		JP 58017402 B	07-04-1983
		US 4270275 A	02-06-1981
		JP 1388652 C	14-07-1987
		JP 59176602 A	06-10-1984
		JP 61037561 B	25-08-1986
		JP 59170704 A	27-09-1984
		JP 55000492 A	05-01-1980
		JP 58179306 A	20-10-1983

This Page is inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images  
problems checked, please do not report the  
problems to the IFW Image Problem Mailbox**